

## Record Accurate Temperature Data

Compatible with all AKCP base units, this temperature sensor will monitor for hotspots in your data center, inside your computer cabinet or at air inlets and exhausts.

### Auto Sense

When the temperature sensor is plugged into the RJ-45 port of the AKCP base unit, it will be automatically detected and configured to display the correct values.

### SNMP and Data Logging

Each Temperature sensor has its own SNMP OID so that data can be collected over a network. External applications like MRTG can be used to draw graphs, and SNMP utilities can log data at 0.2°C resolution. A built in graphing option is included on all base units for graphing temperature variations over a period of time.

### Calibration


AKCP's Temperature sensor is factory calibrated and arrive ready to use. However, you may find that there is a deviation of possibly +/-1°C for temperature. In this case you can off-set the deviation through the base units web itnerface using the "Reading Offset" feature. A calibration certificate can be provided upon request, please contact support@akcp.com.



**Conductive metal tube protects the sensor while still allowing accurate temperature readings**

**Connect the sensor using CAT5 cable to your AKCP base unit. Use of good quality CAT5 will guarantee accurate readings with cable lengths up to 1,000 feet. Every TMP00 ships with a free 5ft CAT5 cable.**

## Technical Drawing

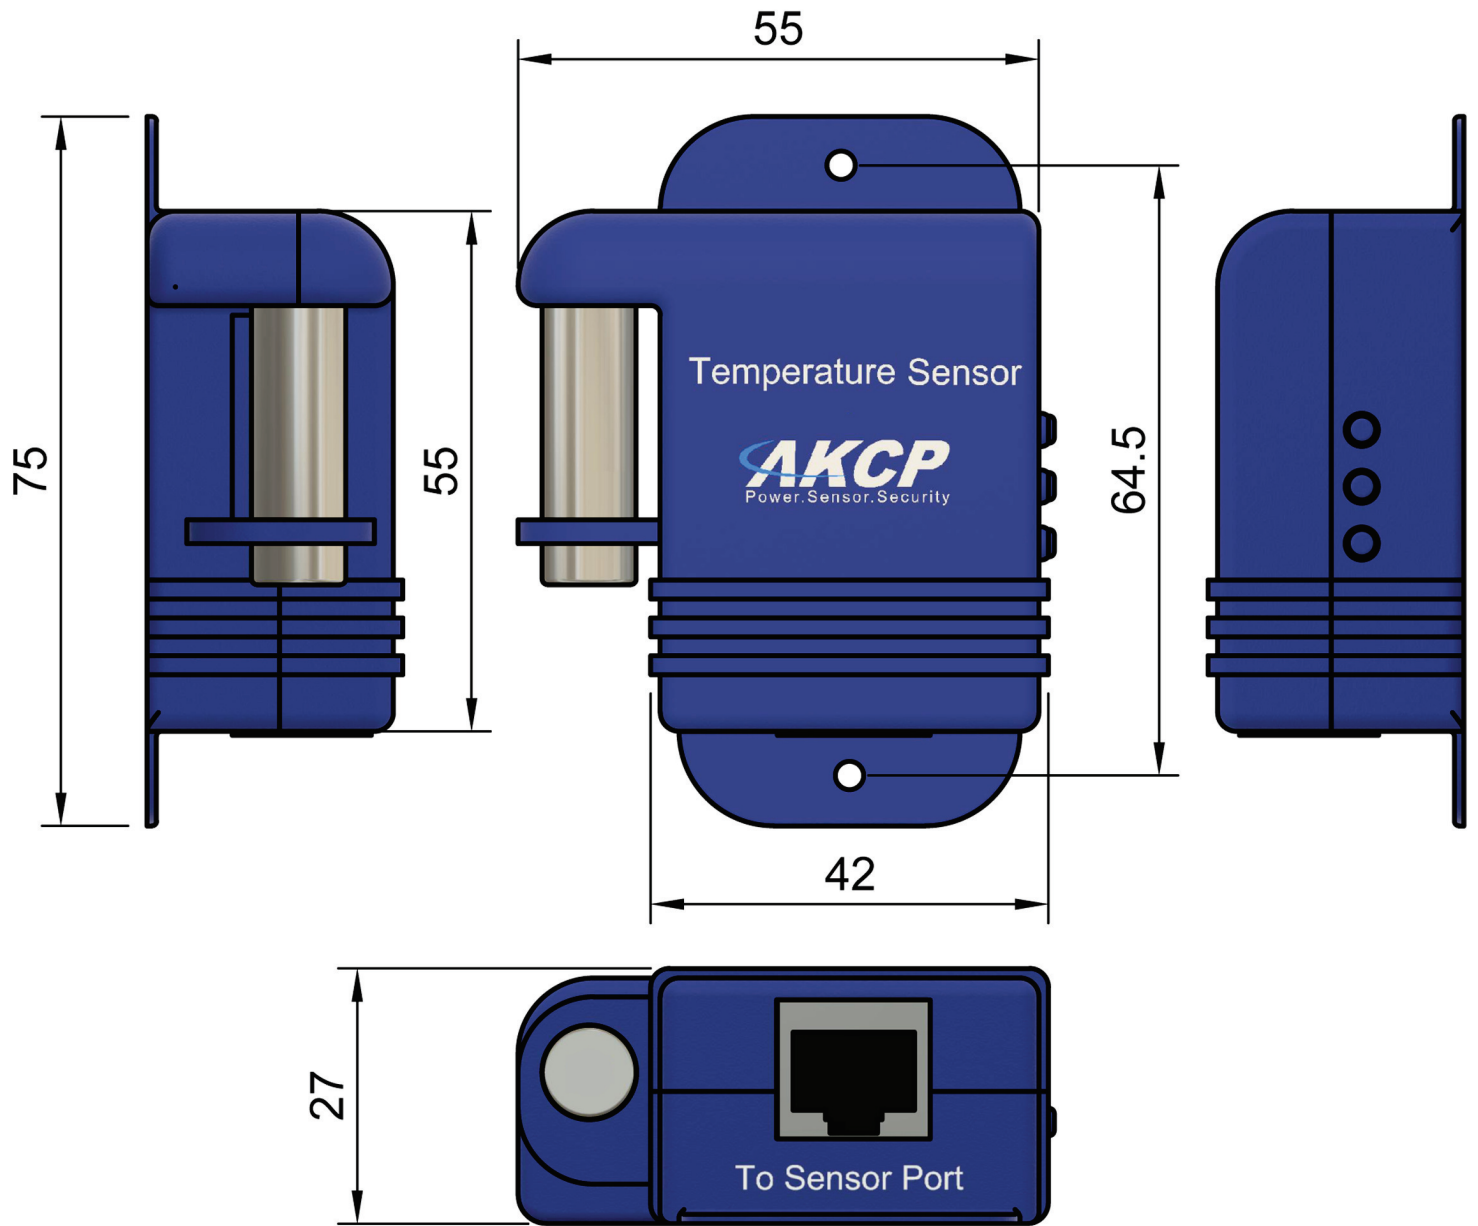

## Technical Specifications

<b>Never needs Calibration</b>	
<b>Measurement range Celsius</b>	-55°C to +75°C
<b>Measurement resolution Celsius</b>	1°C for the sensorProbes and 0.5°C for the securityProbe units.
<b>Measurement accuracy Celsius</b>	±0.5°C accuracy from -10°C to +75°C
<b>Measurement range Fahrenheit</b>	-67°F to +167°F
<b>Measurement resolution Fahrenheit</b>	1°F for the sensorProbes and 0.9°F for the securityProbe units.
<b>Measurement accuracy Fahrenheit</b>	±0.9°F accuracy from +14°F to +167°F
<b>Tube Material</b>	Stainless Steel
<b>Communications Cable</b>	RJ45 jack to temperature sensor using UTP Cat 5 wire
<b>Sensor Type</b>	semiconductor microprocessor controlled
<b>Power Source</b>	powered by the sensorProbe. No additional power needed.
<b>Power Consumption</b>	Typical 10.70 mWatt, 2.14mA sensorProbe autodetects the presence of the temperature sensor
<b>Measurement Rate</b>	one reading every second Up to 2 temperature sensors per sensorProbe2, 8 per sensorProbe8. You can connect up to 8 on the securityProbe main unit and 8 more on each E-sensor8 expansion module.
<b>Temperature Description IOD</b>	.1.3.6.1.4.1.3854.1.2.2.1.16.1.1.<port>
<b>Temperature Status IOD</b>	.1.3.6.1.4.1.3854.1.2.2.1.16.1.4.<port>

## About AKCP

AKCP established in the USA in 1981, created the market for networked temperature, environmental and power monitoring solutions. Today with over 100 employees and 130,000 installations, AKCP is the world's oldest and largest manufacturer of SNMP enabled networked sensors for the data center.